


T型簧片开关 | C型簧片开关



Reed switch T-type
T型簧片开关

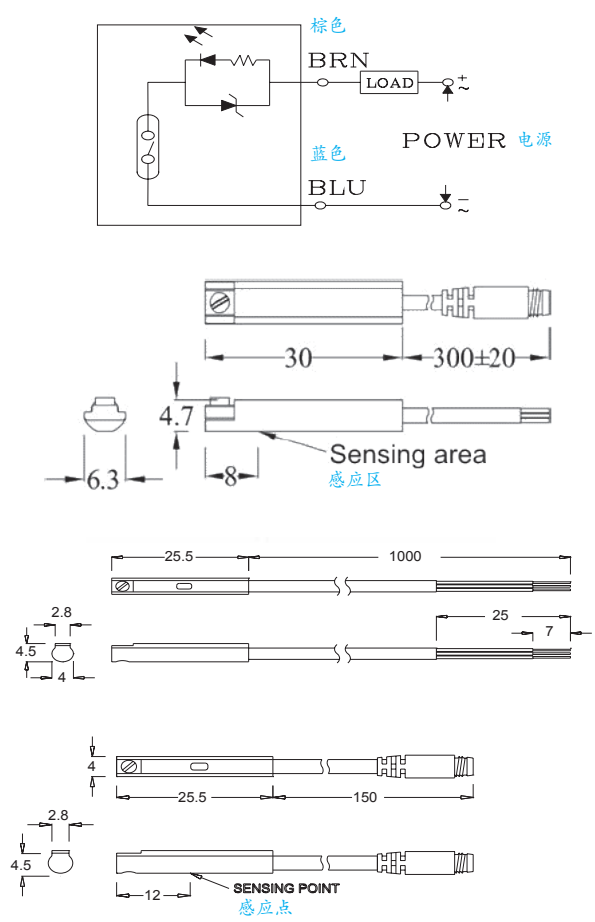

Reed switch C-type
C型簧片开关

Technical information

The magnetic field of a permanent magnet integrated in the yoke triggers the reed switch.

The magnetic piston is integrated as standard. The limits and additional intermediate positions of the yoke can be queried.


技术信息

永久磁的磁场集成到活塞杆中，用以启动簧片开关。

集成的磁活塞为标准活塞。活塞杆限值和额外中部位置，可按要求提供信息。

	Reed switch T-Type T型簧片开关		Reed switch C-Type C型簧片开关	
	Reed switch cable 2m 簧片开关电缆2m	Reed switch connector M8x1 簧片开关接头M8x1	Reed switch 1m cable 簧片开关电缆1m	Reed switch with connector 簧片开关接头
	0000-8121	0000-8122	0000 - 8100	0000 - 8120
Form of contact 触点形式	normally open contact 通常是开放式触点		normally open contact 通常是开放式触点	
Switching voltage 开关电压	5 - 240 V DC / AC		5 - 120 V DC / AC	
Switching current 开关电流	100 mA max. 最大		100 mA max. 最大	
Switching rating 额定开关	10 W max. 最大		10 W max. 最大	
Voltage drop 压降	3.0 V max. 最大		3.0 V max. 最大	
Protection class 防护级别	IEC 60529 / IP 67		IEC 60529 / IP 67	
Operating temperature 运行温度	-10 °C bis +70 °C		-10 °C bis +70 °C	
Color of LED LED颜色	Red 红色		Red 红色	
Cable length 电缆长度	2 m (PVC)	0.3 m (PVC) / Connector M8x1 接头 M8x1	1 m (PVC)	0.15m (PVC) / Connector M8x1 接头 M8x1

T型磁开关 | C型磁开关

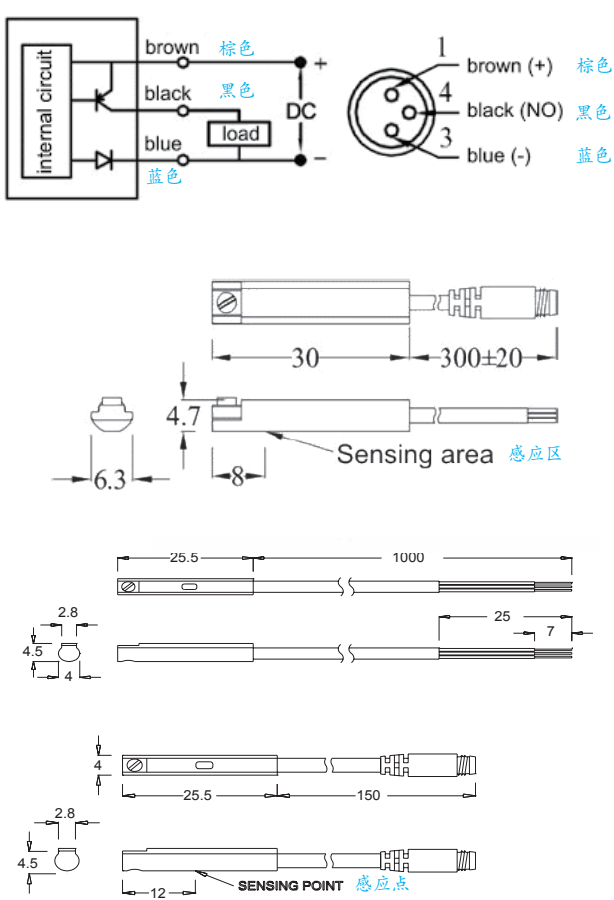

Magnetic switch T-type
T型磁开关



Magnetic switch C-type
C型磁开关

Technical information

The magnetic field of a permanent magnet integrated in the yoke triggers the magnetic switch.

The magnetic piston is integrated as standard. The limits and additional intermediate positions of the yoke can be queried.

技术信息

永久磁的磁场集成到活塞杆中，用以启动磁开关。

集成的磁活塞为标准活塞。活塞杆限值和额外中部位置，可按要求提供信息。

	Magnetic switch T-type T型磁开关		Magnetic switch C-type C型磁开关	
	Magnetic switch 2 m cable 磁开关电缆2m	Magnetic switch with connector 磁开关接头	Magnetic switch 1 m cable 磁开关电缆1m	Magnetic switch with connector 磁开关接头
	0000-8196	0000-8197	0000-8192	0000-8193
Form of contact 触点形式	Normally open contact 通常是开放式触点		Normally open contact 通常是开放式触点	
Switching voltage 开关电压	10 - 30 V DC		5 - 30 V DC	
Switching current 开关电流	200 mA max. 最大		200 mA max. 最大	
Switching rating 额定开关	6 W max. 最大		6 W max. 最大	
Voltage drop 压降	1.5 V max. 最大		1 V max. 最大	
Protection class 防护级别	IEC 60529 / IP 67		IEC 60529 / IP 67	
Operating temperature 运行温度	-10°C bis +70°C		-10 °C bis +70 °C	
Color of LED LED颜色	Yellow 黄色		Green 绿色	
Cable length 电缆长度	2 m (PVC)	0.3 m (PVC) / Connector M8x1 接头 M8x1	1m (PVC)	0.15 m (PVC) / Connector M8x1 接头 M8x1