


ZFF 导流缸, 带两个外部导轮架

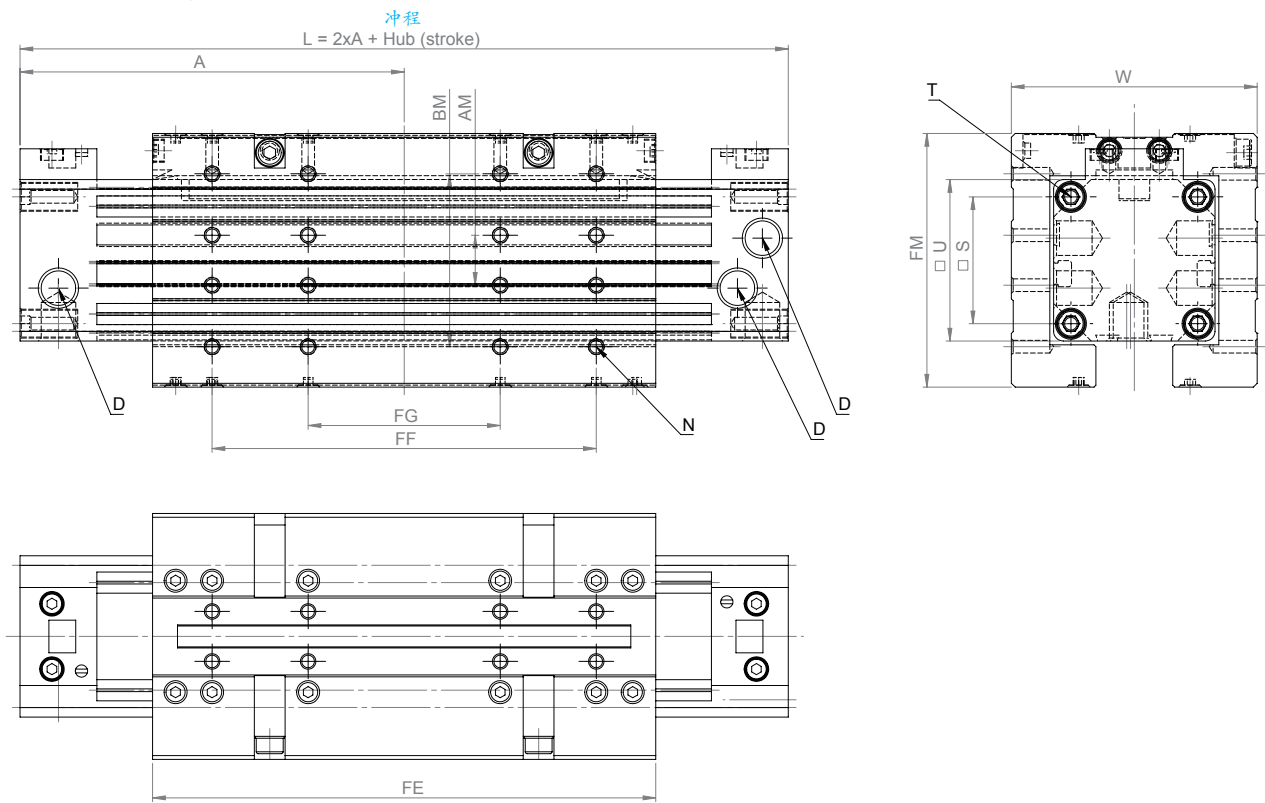

Measurements table

测量值表

Piston-Ø 活塞-Ø	Ø 18 mm	Ø 25 mm	Ø 32 mm	Ø 40 mm	Ø 50 mm	Ø 63 mm
A	80	100	120	150	180	215
AM	10	13	16	22	29	40
BM	35	45	55	70	85	105
D x thread depth D x 螺纹深度	M5 x 6 mm	G1/8" x 8 mm	G1/8" x 8 mm	G1/4" x 12 mm	G1/4" x 12 mm	G3/8" x 12 mm
FE	103	131	171	220	280	333
FF	75	100	140	180	220	280
FG	- - -	50	70	90	110	140
FM	50	66	80	97	116	136
L	L = 2 x A + Stroke 冲程					
N x thread depth N x 螺纹深度	M4 x 7,5 mm	M4 x 8 mm	M5 x 10 mm	M6 x 12 mm	M8 x 16 mm	M8 x 16 mm
S	23,5	33	41	51	63	78
T x thread depth T x 螺纹深度	M3 x 7 mm	M4 x 9 mm	M5 x 10 mm	M6 x 12 mm	M8 x 12 mm	M8 x 12 mm
U	30	42	52	63	78	93
W	48	64	78	95	114	134
Cushioning length 缓冲长度	15	18	24	34	40	49


Example for order:
ZFF Ø 25 Guiding cylinder with 2 carriages
with stroke 100 mm

订单示例:
ZFF Ø 25导流缸, 带两个外部导轮架
冲程100 mm

Order number	订单编号
Port Standard	标准端口
	3 2 5 1 - 0 0 0 0 - 0 1 0 0



ZFU 导流缸, 外部导轮架安装在气缸底部

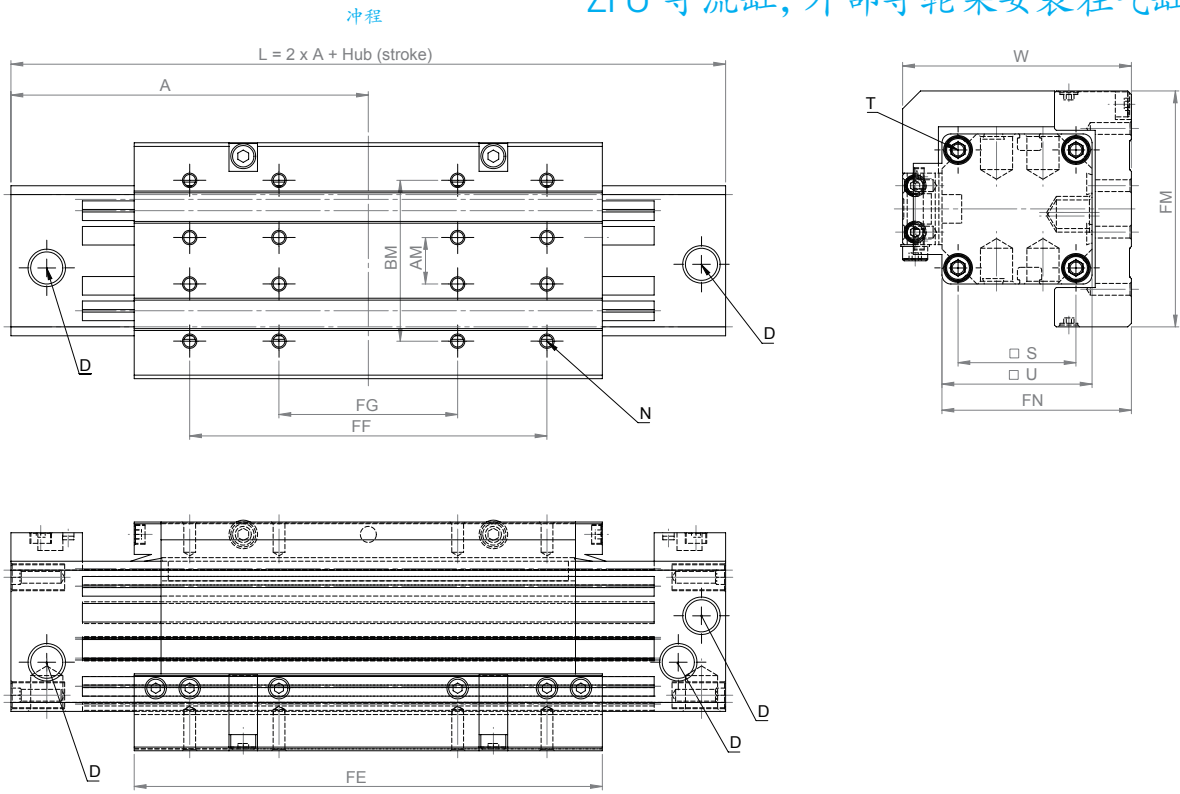

Measurements table

测量值表

Piston-Ø 活塞-Ø	Ø 18 mm	Ø 25 mm	Ø 32 mm	Ø 40 mm	Ø 50 mm	Ø 63 mm
A	80	100	120	150	180	215
AM	10	13	16	22	29	40
BM	35	45	55	70	85	105
D x thread depth D x 螺纹深度	M5 x 6 mm	G1/8" x 8 mm	G1/8" x 8 mm	G1/4" x 12 mm	G1/4" x 12 mm	G3/8" x 12 mm
FE	103	131	171	220	280	333
FF	75	100	140	180	220	280
FG	- - -	50	70	90	110	140
FM	50	66	80	97	116	136
FN	39	53	65	79	96	113,5
L	L = 2 x A + Stroke 冲程					
N x thread depth N x 螺纹深度	M4 x 7,5 mm	M4 x 8 mm	M5 x 10 mm	M6 x 12 mm	M8 x 16 mm	M8 x 16 mm
S	23,5	33	41	51	63	78
T x thread depth T x 螺纹深度	M3 x 7 mm	M4 x 9 mm	M5 x 10 mm	M6 x 12 mm	M8 x 12 mm	M8 x 12 mm
U	30	42	52	63	78	93
W	48	64	78	95	114	134
Cushioning length 缓冲长度	15	18	24	34	40	49

Example for order:
ZFU Ø 25 Guiding cylinder with carriage on the bottom side
with stroke 100 mm

订单示例:
ZFU Ø 25导流缸, 导轮架安装在气缸底部
冲程100 mm

Order number	订单编号
Port Standard	标准端口
	3 2 5 5 - 0 0 0 0 - 0 1 0 0