


ZF 导流缸，带外部导轮架

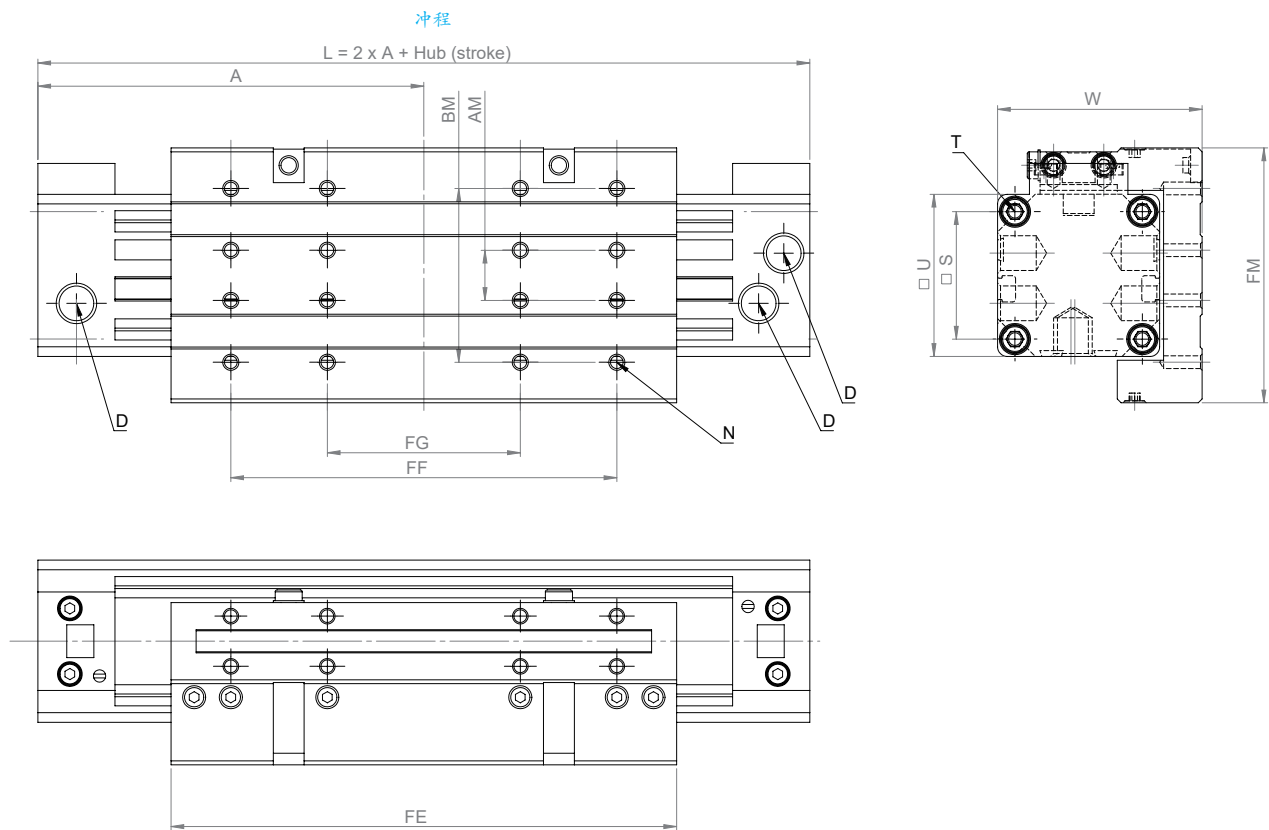

Measurements table

测量值表

Piston-Ø 活塞-Ø	Ø 18 mm	Ø 25 mm	Ø 32 mm	Ø 40 mm	Ø 50 mm	Ø 63 mm
A	80	100	120	150	180	215
AM	10	13	16	22	29	40
BM	35	45	55	70	85	105
D x thread depth D x 螺纹深度	M5 x 6 mm	G1/8" x 8 mm	G1/8" x 8 mm	G1/4" x 12 mm	G1/4" x 12 mm	G3/8" x 12 mm
FE	103	131	171	220	280	333
FF	75	100	140	180	220	280
FG	- - -	50	70	90	110	140
FM	50	66	80	97	116	136
L	L = 2 x A + Stroke 冲程					
N x thread depth N x 螺纹深度	M4 x 7,5 mm	M4 x 8 mm	M5 x 10 mm	M6 x 12 mm	M8 x 16 mm	M8 x 16 mm
S	23,5	33	41	51	63	78
T x thread depth T x 螺纹深度	M3 x 7 mm	M4 x 9 mm	M5 x 10 mm	M6 x 12 mm	M8 x 12 mm	M8 x 12 mm
U	30	42	52	63	78	93
W	39	53	65	79	96	113,5
Cushioning length 缓冲长度	15	18	24	34	40	49


Example for order:
ZF Ø 25 Guiding cylinder with carriage
with stroke 100 mm

订单示例:
ZF Ø 25导流缸, 带导轮架
冲程100 mm

Order number	订单编号
Port Standard	标准端口
	3 2 5 0 - 0 0 0 0 - 0 1 0 0



ZFK 导流短缸，带外部导轮架

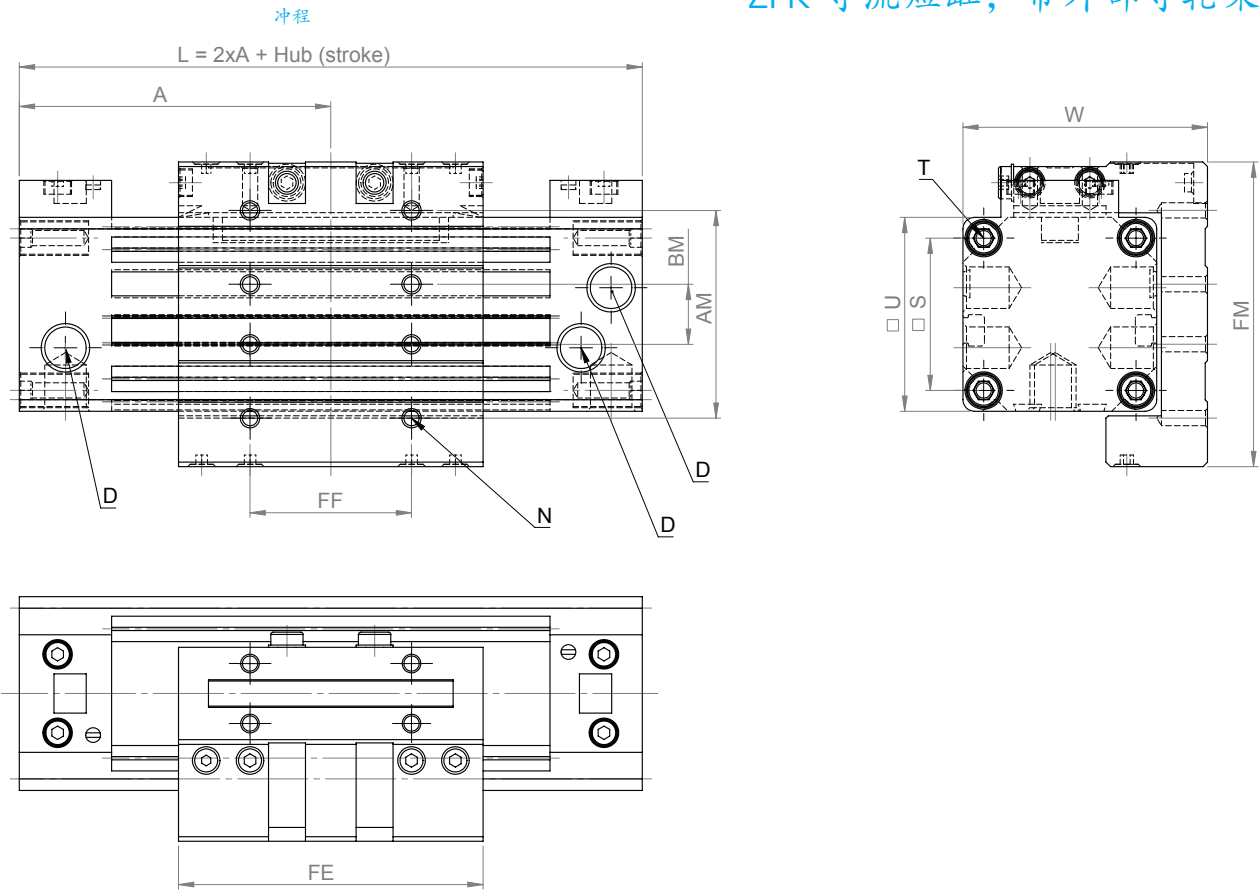

Measurements table

测量值表

Piston-Ø 活塞-Ø	Ø 18 mm	Ø 25 mm	Ø 32 mm	Ø 40 mm	Ø 50 mm	Ø 63 mm
A	57,5	67,5	77,5	95	105	125
AM	10	13	16	22	29	40
BM	35	45	55	70	85	105
D x thread depth D x 螺纹深度	M5 x 6 mm	G1/8" x 8 mm	G1/8" x 8 mm	G1/4" x 12 mm	G1/4" x 12 mm	G3/8" x 12 mm
FE	58	66	86	110	130	153
FF	30	35	55	70	70	100
FM	50	66	80	97	116	136
L	L = 2 x A + Stroke 冲程					
N x thread depth N x 螺纹深度	M4 x 7,5 mm	M4 x 8 mm	M5 x 10 mm	M6 x 12 mm	M8 x 16 mm	M8 x 16 mm
S	23,5	33	41	51	63	78
T x thread depth T x 螺纹深度	M3 x 7 mm	M4 x 9 mm	M5 x 10 mm	M6 x 12 mm	M8 x 12 mm	M8 x 12 mm
U	30	42	52	63	78	93
W	39	53	65	79	96	113,5
Cushioning length 缓冲长度	15	18	24	34	40	49

Example for order:
ZFK Ø 25 Guiding cylinder short with external guide carriage
with stroke 100 mm

订单示例:
ZFK Ø 25导流短缸带外部导轮架
冲程100 mm

Order number	订单编号
Port Standard	标准端口
	3 2 5 2 - 0 0 0 0 - 0 1 0 0