


ZS+/ZK+ 标准气缸, 带宽活塞杆头



ZS+ Standard cylinder with broad yoke head
ZS+ 标准气缸, 带宽活塞杆头

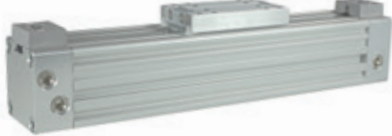

ZK+ Standard cylinder short with broad yoke head
ZK+ 标准短缸, 带宽活塞杆头

ZS+/ZK+ standard cylinder with broad yoke head

Technical information


- Standard cylinder with broad yoke head for absorbing greater forces and torques than the normal ZS/ZK standard cylinders.
- Yoke head is supported in grooves of the profile tube via guiding bars and hence has greater stability.
- ZS+/ZK+ offer a more performant solution as compared to normal ZS/ZK standard cylinders.
- In terms of mass, ZS+/ZK+ differ from the normal ZS/ZK standard cylinders only by a broader yoke head.
- It is NOT possible to install additional guiding elements on ZS+/ZK+.

ZS+ / ZK + 标准气缸, 带宽活塞杆头

技术信息

- 带宽活塞杆头的标准气缸比普通ZS/ZK标准气缸吸收更多力和扭矩
- 通过导向杆将活塞杆头支撑于异形管材凹槽内，从而提高其稳定性。
- 与普通ZS/ZK标准气缸相比，ZS+/ZK+气缸的性能更强
- 在质量上，ZS+/ZK+气缸与普通ZS/ZK标准气缸的差异是活塞杆头更宽
- ZS+/ZK+气缸上不能安装任何附加导流元件

ZS+/ZK+ 标准气缸, 带宽活塞杆头

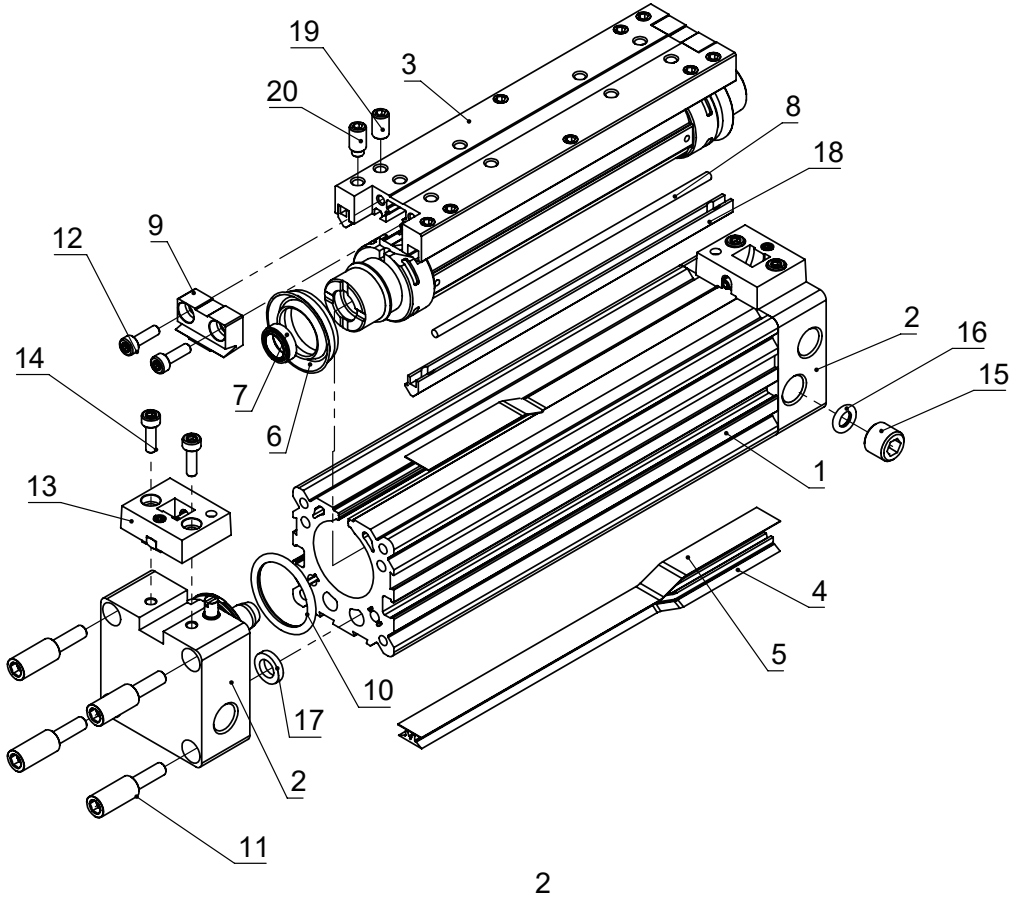

Part list

零件清单

Pos. 序号	Description 说明	Order number 订单编号		Piece 件数	
		ZS+	ZK+	ZS+	ZK+
1	Profile tube 异形管材	1XX0-0011		1	
2	Set of end caps 端盖组件	0XX0-0121		1	
3	Yoke 活塞杆	1XX0-1056	2XX0-1056	1	1
4	PU-sealing strip PU密封条	1XX0-0033			
5	Cover strip 盖条	1XX0-0041			
6	Piston seal 活塞密封件	1XX0-8008		2	
7	Cushion ring 缓冲环	1XX0-8001		2	
8	Press bar 除尘杆	3XX0-0231	3XX0-0232	2	2
9	Head wiper 除尘杆端盖	1XX0-0152		2	
10	O-Ring O形环	1XX0-8090		2	
11	Special screw 特制螺栓	1XX0-0261		8	
12	Cylinder head screw 气缸头螺栓	DIN 912 / ISO 4762		4	
13	Tape cap 封条端盖	1XX0-1142		2	
14	Special screw 特制螺栓	DIN 912 / ISO 4762		4	
15	Lock screw 锁紧螺栓	1XX0-0183		6	
16	O-Ring O形环	1XX0-8092		6	
17	Flat seal 平面密封件	1XX0-8240		2	
18	Lock screw 锁紧螺栓	3XX0-0221	3XX0-0222	2	2
19	Grub screw 无头螺丝	DIN 913 / ISO 4026		6	4
20	Grub screw 无头螺丝	DIN 913 / ISO 4026		4	

XX = Zylinderdurchmesser / 气缸直径